


FHT-538

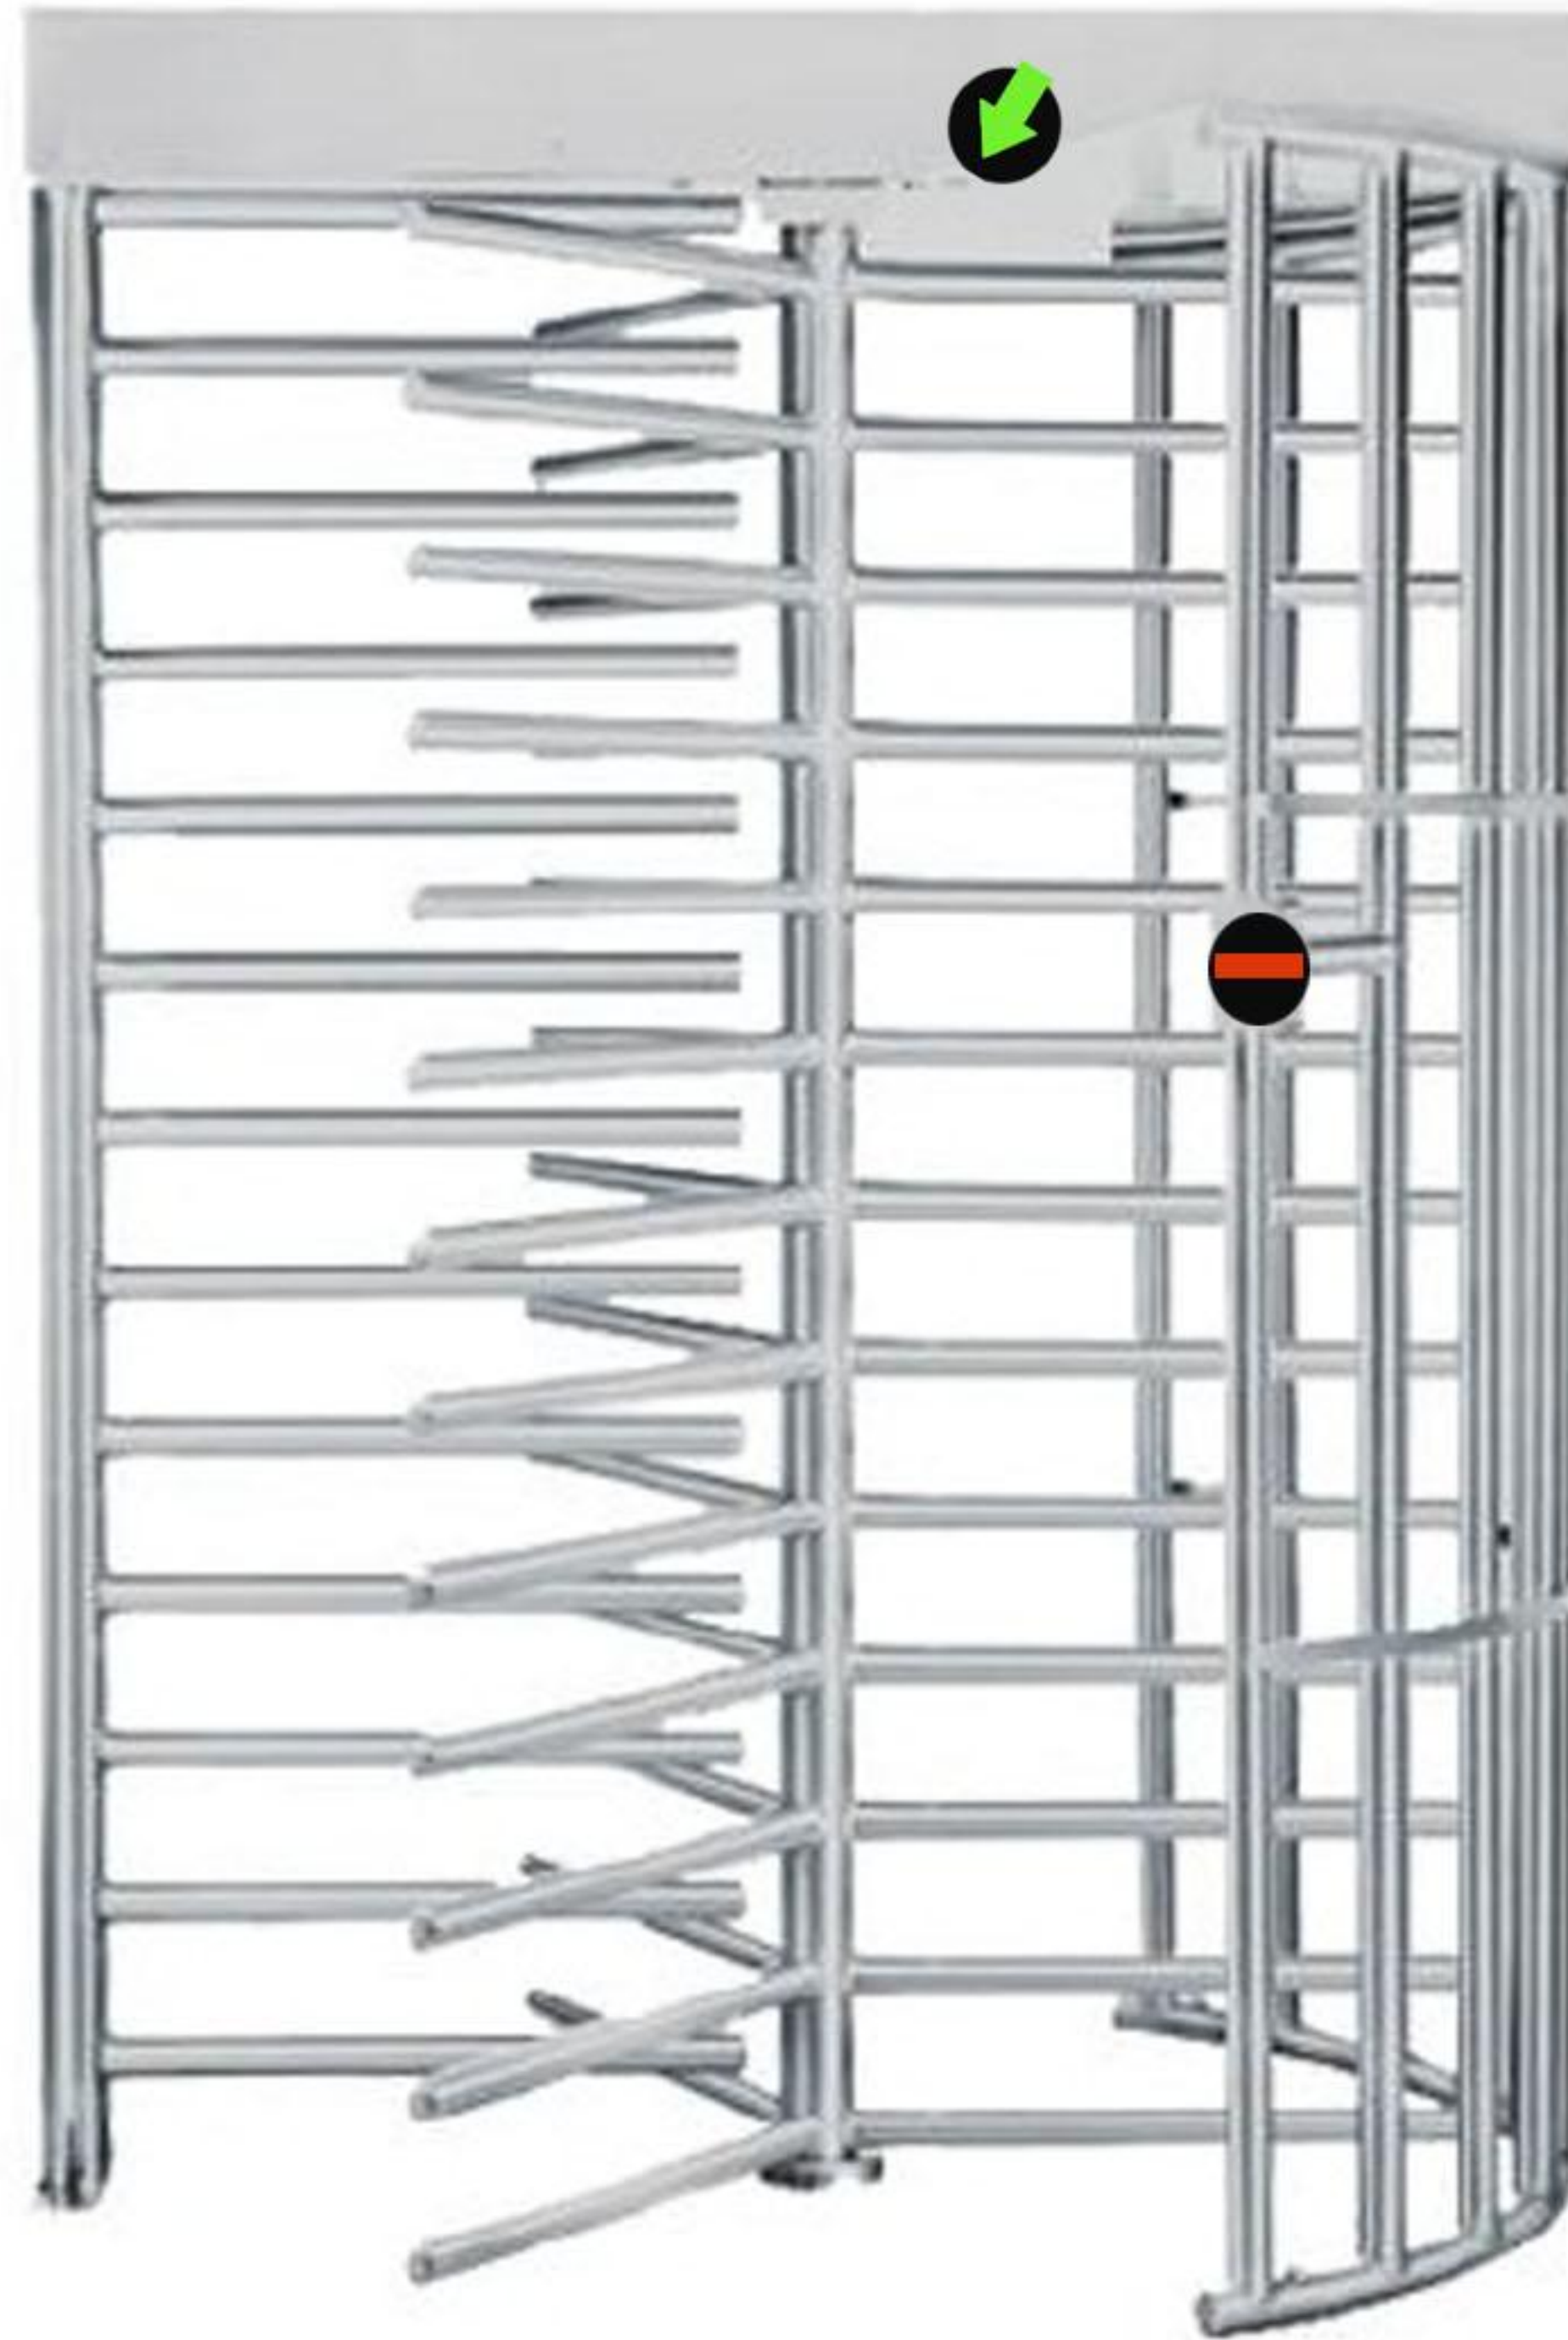

➔ Full Height Turnstile - FHT538

Power Supply : 100V ~ 240V AC
Control Circuit : 24V DC
Power Consumption : 30W
Operating Temper range : -25°C ~ +70°C
Protection level (IP) : ≥ 44
Humidity : 95%
Hydraulic damper : Adjustable
Solenoid : 24V DC 100%
Throughout : Person
Signal Output : 12V Pulse
Communication Interface : RS485 or TCP IP
Passage width : ≤ 650mm
Frequency : ≤ 50Hz or 60Hz
Electro-magnetic drive : DC
Section version : 120 degree
No of arms : 3 arms
Dimensions : 1630 x 1500 x 2310 mm
Net weight : 220 kg

Feature :

- ▶ Designed for secure operation wish aesthetics inland
- ▶ Corrosion protected S/S frame
- ▶ Minimal exposed hardware
- ▶ Heavy Gauge materials ASTM Standard
- ▶ Consists of rotor assembly, shield
- ▶ Assembly, barrier section, mechanism housing & ceiling plate
- ▶ Double anti-clipping function, photocell anti-clipping & mechanical anti-clipping
- ▶ The barrier can be set to delay closing in 1 ~ 60s after a valid card reading
- ▶ Single passage in the set direction
- ▶ Bi-directional single passage
- ▶ Free passage in the direction
- ▶ Always free or locked