


eSSL A4-E8BC



A4-M1ACMMS

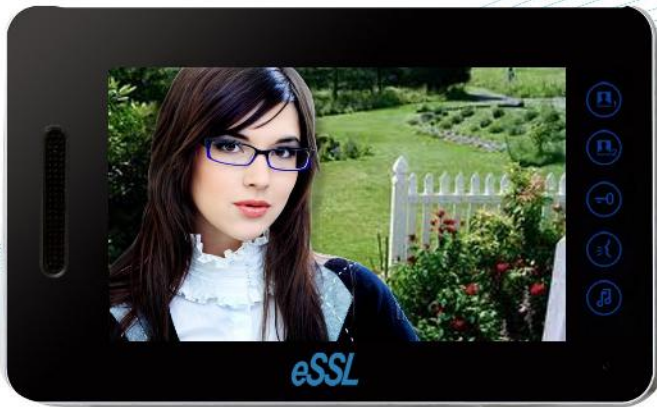

➔ Video Door Phone

Indoor Display:

Model : eSSL A4-E8BC Indoor Unit
Input Power : DC13.5V
Consumption : < 1.5W (standby); < 15W(working)
Screen : 7" colour LCD
Connection : 4 wires (polarity)
Call time : 90s
Talk/Monitor Time : 60s
Ringtone : 9 chord ringtones
Ambient Temperature : 0 ~+40°C
Installation : Surface mount
Dimensions(W×H×D) : 223mm×138mm×29.4mm
Cable Length : ≤ 50m – AWG20; ≤ 100m – AWG18
Communication : Hands free

Outdoor Camera:

Model : eSSL A4-M1ACMMS Outdoor Unit
Camera : 1/3" color CMOS
Minimum Illumination : 1 LUX (W/IR LED F1.2)
Input Voltage : DC 13.5V (Fed by Indoor Phone)
Connection : 4 wires (Polarized)
Call Tone : Ring twice; same as the ringtone of Indoor Phone connected
Communication : Hands free
Ambient Temperature : -10°C ~ +45°C
Installing Means : Surface Mount
Dimensions (W×H×D) : 112.3 x 171.8 x 36.6 mm

Features:

7" Colour LCD Screen
Touch Intuitive
Enables Two way communication
Unlocks the electric lock on recognizing the visitor
Choose from 9 different Ringtones
Advanced Night Vision Camera
Supports 2 Out Doors Unit with 5 Indoor Unit